

Novax Class 0 Specification Sheet

NOVAX RUBBER INSULATING GLOVES

PRODUCT DESCRIPTION:

Novax rubber electrical insulating gloves, class 0, 11-inch.

- Meet ANSI/ASTM D120 standard and NFPA 70E for use around electrical hazards and arc flash protection.
- Contoured shape reduces hand fatigue.
- Natural rubber construction offers the required dielectric properties combined with flexibility, strength and durability.
- Silicone free.

Applications:

Used exclusively for electrical purposes, such as power generation, electrical contractors, hybrid automotive repair/service, hybrid automobile manufacturing, industrial plant maintenance, utilities.

TECHNICAL DATA:

Shell: Natural rubber

Color: Orange(147); Black(150); Black/Orange(155)

Cuff Style: Rolled

Available Sizes: 8-11

Packaging: 1 pair per bag/box, 12 pair per case

Case Dimensions (147): cm - 43 x 43 x 32.5 / in - 16.9 x 16.9 x 12.8
(150/155): cm - 36.5 x 32 x 48 / in - 14.4 x 12.6 x 18.9

Case Weight: 11.0 lbs / 5.0 kg

Manufacturer Certifications: ISO9001:2000 certified

Country of Origin/Harmonization Code: Malaysia/4015.19.1050

MAX USE VOLTAGE:

	AC V rms	DC V
Class 0	1,000	1,500


10 NOVAX™ by G.B. INDUSTRIES
ANSI / ASTM CLASS 0 MADE IN MALAYSIA D120 TYPE I
MAX USE VOLT 1000V AC

BARCODE #	PAIR	CASE
147-0-11/8	01616314038068	02616314038068
147-0-11/9	01616314038075	02616314038075
147-0-11/10	01616314038082	02616314038082
147-0-11/11	01616314038099	02616314038099
150-0-11/8	01616314050830	02616314050839
150-0-11/9	01616314050847	02616314050846
150-0-11/10	01616314050854	02616314050853
150-0-11/11	01616314050861	02616314050860
155-0-11/8	01616314059338	02616314059337
155-0-11/9	01616314059345	02616314059344
155-0-11/10	01616314059352	02616314059351
155-0-11/11	01616314059369	02616314059368



DIMENSIONS:

Size Available	8	9	10	11
Over Length (cm) – A	28.0	28.0	28.0	28.0
(in)	11.0	11.0	11.0	11.0
Palm Width (cm) – B	10.0	10.5	12.0	13.5
(in)	3.9	4.1	4.7	5.3
Max thickness (mm)	1.02	1.02	1.02	1.02

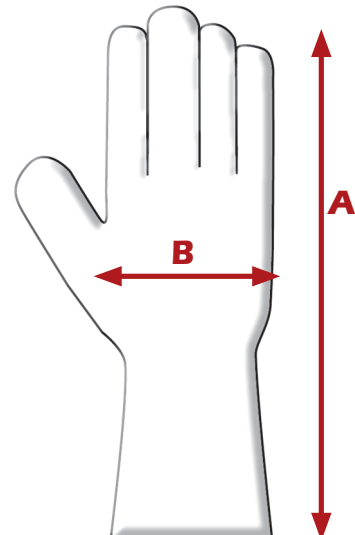

This document is the property of PIP and the information contained herein is proprietary to PIP.

Protective Industrial Products | 26 Computer Drive East | Albany, NY 12205
Phone: 518-861-0133 | Toll free: 800-262-5755 | Fax: 518-861-0144 | www.pipusa.com | sales@pipusa.com

150-0-14

Specification Sheet

NOVAX RUBBER INSULATING GLOVES

PRODUCT DESCRIPTION:

Novax rubber electrical insulating gloves, black, class 0, 14-inch, smooth finish.

- Meet ANSI/ASTM D120 standard and NFPA 70E for use around electrical hazards and arc flash protection.
- Contoured shape reduces hand fatigue.
- Natural rubber construction offers the required dielectric properties combined with flexibility, strength and durability.
- Silicone free.

Applications:

Used exclusively for electrical purposes, such as power generation, electrical contractors, hybrid automotive repair/service, hybrid automobile manufacturing, industrial plant maintenance, utilities.

TECHNICAL DATA:

Shell: Natural rubber

Color: Black

Cuff Style: Rolled

Available Sizes: 7-11

Packaging: 1 pair per bag/box, 12 pair per case

Case Dimensions: cm - 43 x 43 x 32.5 / in - 16.9 x 16.9 x 12.8

Case Weight: 17.6 lbs / 8.0 kg

Manufacturer Certifications: ISO9001:2000 certified

Country of Origin/Harmonization Code: Malaysia/4015.19.1050

MAX USE VOLTAGE:

	AC V rms	DC V
Class 0	1,000	1,500


10 NOVAX™ by G.B. INDUSTRIES
ANSI / ASTM CLASS 0 MADE IN MALAYSIA D120 TYPE I
MAX USE VOLT 1000V AC

BARCODE #	PAIR	CASE
150-0-14/7	01616314066558	02616314066557
150-0-14/8	01616314066541	02616314066540
150-0-14/9	01616314066534	02616314066533
150-0-14/10	01616314066565	02616314066564
150-0-14/11	01616314066572	02616314066571



DIMENSIONS:

Size Available	7	8	9	10	11	12
Over Length (cm) – A	36.0	36.0	36.0	36.0	36.0	36.0
(in)	14.0	14.0	14.0	14.0	14.0	14.0
Palm Width (cm) – B	9.0	10.0	10.5	12.0	13.5	15.0
(in)	3.5	3.9	4.1	4.7	5.3	5.9
Max thickness (mm)	1.02	1.02	1.02	1.02	1.02	1.02

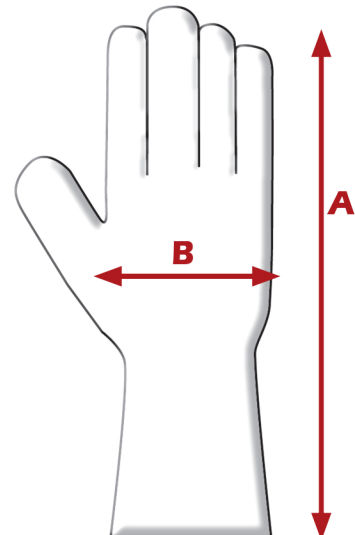

Novax Class 2 Specification Sheet

NOVAX RUBBER INSULATING GLOVES

PRODUCT DESCRIPTION:

Novax rubber electrical insulating gloves, class 2, 14-inch.

- Meet ANSI/ASTM D120 standard and NFPA 70E for use around electrical hazards and arc flash protection.
- Contoured shape reduces hand fatigue.
- Natural rubber construction offers the required dielectric properties combined with flexibility, strength and durability.
- Silicone free.

Applications:

Used exclusively for electrical purposes, such as power generation, electrical contractors, hybrid automotive repair/service, hybrid automobile manufacturing, industrial plant maintenance, utilities.

TECHNICAL DATA:

Shell: Natural rubber

Color: Orange (147); Black (150); Black/Orange (155)

Cuff Style: Rolled

Available Sizes: 8-11

Packaging: 1 pair per bag/box, 12 pair per case

Case Dimensions: (cm) - 43 x 43 x 50.3 / (in) - 16.9 x 16.9 x 19.8

Case Weight: 19.8 lbs / 9.0 kg

Manufacturer Certifications: ISO9001:2000 certified

Country of Origin/Harmonization Code: Malaysia/4015.19.1050

MAX USE VOLTAGE:

	AC V rms	DC V
Class 2	17,000	25,500

10 NOVAX™ by G.B. INDUSTRIES
ANSI / ASTM CLASS 2 D120 TYPE I
MAX USE VOLT 17000V AC
MADE IN MALAYSIA

BARCODE #	PAIR	CASE
147-2-14/8	01616314038143	02616314038143
147-2-14/9	01616314038150	02616314038150
147-2-14/10	01616314038167	02616314038167
147-2-14/11	01616314038174	02616314038174
150-2-14/8	01616314050915	02616314050914
150-2-14/9	01616314050922	02616314050921
150-2-14/10	01616314050939	02616314050938
150-2-14/11	01616314050946	02616314050945
155-2-14/8	01616314058713	02616314058712
155-2-14/9	01616314058706	02616314058705
155-2-14/10	01616314058676	02616314058675
155-2-14/11	01616314058577	02616314058576



DIMENSIONS:

Size Available	8	9	10	11
Over Length (cm) – A	36.0	36.0	36.0	36.0
(in)	14.0	14.0	14.0	14.0
Palm Width (cm) – B	10.0	10.5	12.0	13.5
(in)	3.9	4.1	4.7	5.3
Max thickness (mm)	2.29	2.29	2.29	2.29

